

# OPA INSTALLATION GUIDE (FOR DUAL OPAS)

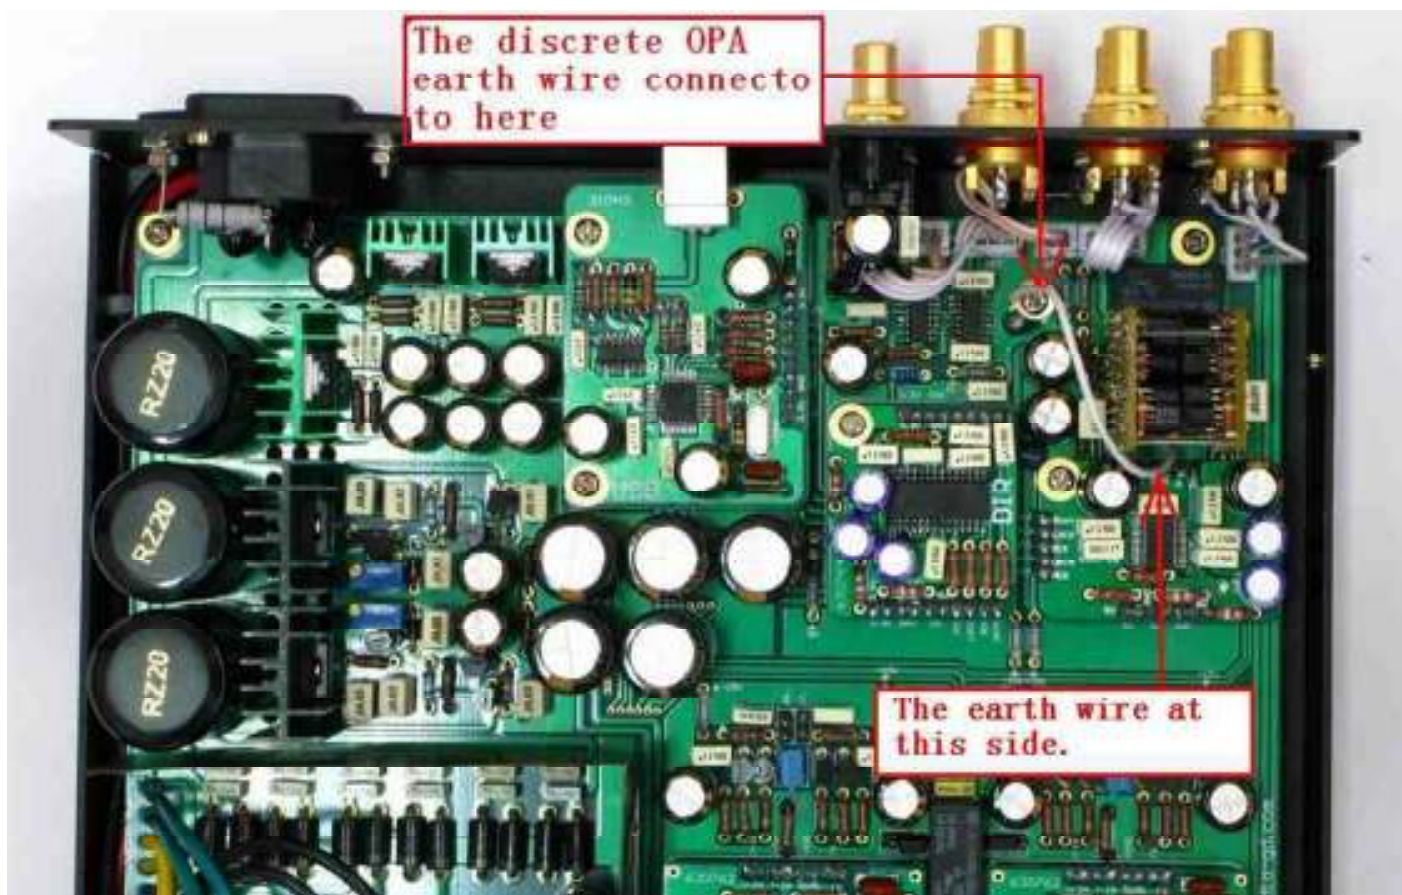


Fig 1 – Installation for Audio Gd FUN

1. Remove the top of the chassis (may require a screwdriver).
2. Remove the default opamp by pulling it out. This can also be done with a set of pliers.
3. Install the new OPA in the correct direction (for the FUN, this means the wire will be coming out from the bottom of the OPA). Some units may require you to use a OPA extension cable.
4. Ground the OPA the OPA by plugging the wire protruding from the OPA into the unit's ground slot. For the FUN, see fig 1. (While this is not a requirement, it is recommended to ensure you get the best out of the OPA.)
5. Replace the lid of the chassis.

